GPUpartner

VALIDATION REPORT · TEXT GENERATION

# Command A Plus 05 2026 Bf16

on 2× RTX PRO 6000 Blackwell · 6-bit (Q6_K) · Ollama / LM Studio · Chat

STATUS · NOV 22, 2026

**Validated**

5 of 5 checks pass

**Command A Plus 05 2026 Bf16 at 6-bit runs on the 2× RTX PRO 6000 Blackwell with 195K of context at about 54 tokens a second.**


## VALIDATION

| CHECK | TARGET | RESULT | STATUS |
|---|---|---|---|
| Fits in GPU memory | 192 GB usable | 175 GB needed | PASS |
| Headroom | 5% free | 16.6 GB free (9%) | PASS |
| Context for chat | 16K or more | 195K | PASS |
| Writing speed | 15 tok/s or more | 54 tok/s | PASS |
| First reply | under 3 s, 2K prompt | 0.8 s | PASS |

Targets: a reply you can read along with, a first reply the use case tolerates, and 5% of memory left free. Calculated from published specs, not benchmarked.

## BUDGET

| | |
|---|---|
| HARDWARE, ONE-TIME | MSRP not entered |
| POWER, PER YEAR | $210 · 800 W at the wall |
| CLOUD INSTEAD, PER YEAR | $3,444 |
| 3-YEAR TOTAL, OWNED | Hardware + $630 power |
| 3-YEAR TOTAL, CLOUD | $10,331 |
| BREAK-EVEN | Needs the hardware MSRP |

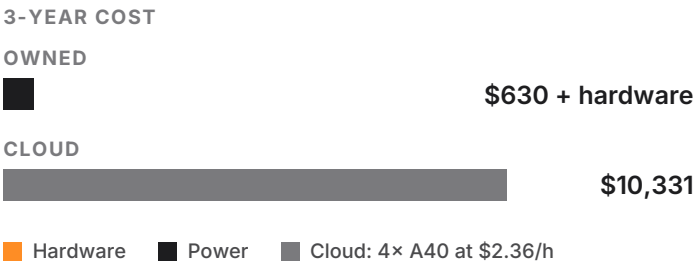


Budget basis: 4 h a day, power at $0.18 per kWh, cloud at RunPod on-demand prices as of Nov 22, 2026. Hardware at the MSRP entered in the calculator, not a GPU Partner quote. A 3-year view; resale value, staff time and taxes aren't counted.

GPUpartner

TECHNICAL DETAIL · TEXT GENERATION

# Command A Plus 05 2026 Bf16

on 2× RTX PRO 6000 Blackwell · 6-bit (Q6_K) · Ollama / LM Studio · Chat

## SETUP

| | |
|---|---|
| PARAMETERS | 219B, 25.5B active |
| PRECISION | 6-bit (Q6_K) |
| CONTEXT | 195K, auto |
| CHATS AT ONCE | 1 |
| USE | Chat |
| RUNS IN | Ollama / LM Studio |
| HARDWARE | 2× RTX PRO 6000 Blackwell |
| GPU CAN USE | 192 GB of 192 GB |

## SAME MODEL, OTHER MACHINES

| | |
|---|---|
| RTX 4090 | Too big |
| RTX 5090 | Too big |
| RTX PRO 6000 BLACKWELL | 2-bit · 105 tok/s |
| M5 MAX 128 GB | 2-bit · 40 tok/s |
| M3 ULTRA 256 GB | 6-bit · 23 tok/s |
| DGX SPARK 128 GB | 3-bit · 15 tok/s |
| RYZEN AI MAX+ 395 128 GB | 2-bit · 15 tok/s |

## MEMORY

| | |
|---|---|
| WEIGHTS | 167 GB |
| CONTEXT | 6.5 GB |
| RUNTIME | 1.8 GB |
| SYSTEM | 0.0 GB |
| FREE | 16.6 GB |

## HOW TO RUN IT

| | |
|---|---|
| LLAMA.CPP | `llama-server -hf bartowski/command-a-plus-05-2026-GGUF` |
| VLLM | `vllm serve CohereLabs/command-a-plus-05-2026-bf16` |
| MODEL CARD | huggingface.co/CohereLabs/command-a-plus-05-2026-bf16 |

## METHOD AND ASSUMPTIONS

Memory is the weights (parameters times bits per weight, read from each model's config.json), the context cache for every chat, and the runtime, against the memory this GPU can use after the OS and display take theirs. Writing speed is memory bandwidth over the bytes read per token, plus a per-layer latency, calibrated against llama.cpp benchmarks. First reply is the prompt's FLOPs over the chip's dense 16-bit TFLOPS at the runtime's measured efficiency. Running cost is power at the wall at your rate and hours; the cloud figure is the cheapest RunPod on-demand GPU that runs the same job. Accuracy: memory lands within about a gigabyte; speeds and times are rough, about ±25%. Model data and hardware specs checked Nov 2026; cloud prices are RunPod's on-demand list as of Nov 22, 2026. Report VR-17481AP, generated November 22, 2026.