GPUpartner

VALIDATION REPORT · TEXT GENERATION

# Devstral Small 2 24B

on RTX 4090 · 6-bit (Q6_K) · Ollama / LM Studio · Chat

STATUS · OCT 23, 2026

**Validated**

5 of 5 checks pass

**Devstral Small 2 24B at 6-bit runs on the RTX 4090 with 20K of context at about 35 tokens a second.**

## VALIDATION

| CHECK | TARGET | RESULT | STATUS |
|---|---|---|---|
| Fits in GPU memory | 24.0 GB usable | 22.3 GB needed | PASS |
| Headroom | 5% free | 1.7 GB free (7%) | PASS |
| Context for chat | 16K or more | 20K | PASS |
| Writing speed | 15 tok/s or more | 35 tok/s | PASS |
| First reply | under 3 s, 2K prompt | 0.6 s | PASS |

Targets: a reply you can read along with, a first reply the use case tolerates, and 5% of memory left free. Calculated from published specs, not benchmarked.

## BUDGET

| | |
|---|---|
| HARDWARE, ONE-TIME | MSRP not entered |
| POWER, PER YEAR | $92 · 350 W at the wall |
| CLOUD INSTEAD, PER YEAR | $394 |
| 3-YEAR TOTAL, OWNED | Hardware + $276 power |
| 3-YEAR TOTAL, CLOUD | $1,182 |
| BREAK-EVEN | Needs the hardware MSRP |

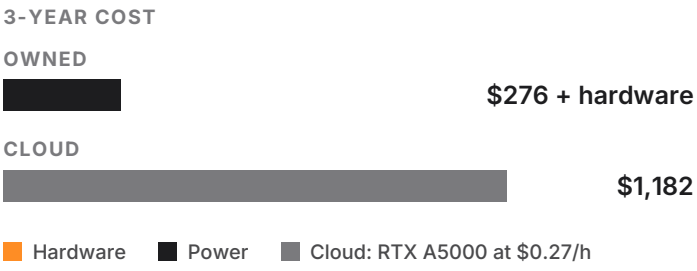


Budget basis: 4 h a day, power at $0.18 per kWh, cloud at RunPod on-demand prices as of Oct 23, 2026. Hardware at the MSRP entered in the calculator, not a GPU Partner quote. A 3-year view; resale value, staff time and taxes aren't counted.

GPUpartner

TECHNICAL DETAIL · TEXT GENERATION

# Devstral Small 2 24B

on RTX 4090 · 6-bit (Q6_K) · Ollama / LM Studio · Chat

## SETUP

| | |
|---|---|
| PARAMETERS | 24B |
| PRECISION | 6-bit (Q6_K) |
| CONTEXT | 20K, auto |
| CHATS AT ONCE | 1 |
| USE | Chat |
| RUNS IN | Ollama / LM Studio |
| HARDWARE | RTX 4090 |
| GPU CAN USE | 24.0 GB of 24.0 GB |

## MEMORY

| | |
|---|---|
| WEIGHTS | 18.3 GB |
| CONTEXT | 3.1 GB |
| RUNTIME | 877 MB |
| SYSTEM | 0.0 GB |
| FREE | 1.7 GB |

## SUGGESTED CHANGES

| | |
|---|---|
| 8-BIT CACHE | Room for 40K context |

## SAME MODEL, OTHER MACHINES

| | |
|---|---|
| RTX 5090 | FP8 · 47 tok/s |
| RTX PRO 6000 BLACKWELL | FP8 · 47 tok/s |
| M5 MAX 128 GB | FP8 · 17 tok/s |
| M3 ULTRA 256 GB | FP8 · 20 tok/s |
| DGX SPARK 128 GB | FP8 · 7.6 tok/s |
| RYZEN AI MAX+ 395 128 GB | FP8 · 6.1 tok/s |
| DGX STATION GB300 | FP8 · 160 tok/s |

## HOW TO RUN IT

| | |
|---|---|
| OLLAMA | `ollama run devstral-small-2:24b` |
| LLAMA.CPP | `llama-server -hf unsloth/Devstral-Small-2-24B-Instruct-2512-GGUF` |
| VLLM | `vllm serve mistralai/Devstral-Small-2-24B-Instruct-2512` |
| MLX (MAC) | `mlx_lm.chat --model mlx-community/Devstral-Small-2-24B-Instruct-2512-4bit` |
| MODEL CARD | huggingface.co/mistralai/Devstral-Small-2-24B-Instruct-2512 |

## METHOD AND ASSUMPTIONS

Memory is the weights (parameters times bits per weight, read from each model's config.json), the context cache for every chat, and the runtime, against the memory this GPU can use after the OS and display take theirs. Writing speed is memory bandwidth over the bytes read per token, plus a per-layer latency, calibrated against llama.cpp benchmarks. First reply is the prompt's FLOPs over the chip's dense 16-bit TFLOPS at the runtime's measured efficiency. Running cost is power at the wall at your rate and hours; the cloud figure is the cheapest RunPod on-demand GPU that runs the same job. Accuracy: memory lands within about a gigabyte; speeds and times are rough, about ±25%. Model data and hardware specs checked Oct 2026; cloud prices are RunPod's on-demand list as of Oct 23, 2026. Report VR-1MARAFV, generated October 23, 2026.